



THE LINE

| MATERIALI / MATERIALS |                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------|
| Struttura / Frame     | Ottone / Brass                                                                              |
| Vetro / Glass         | Pirex satinato (vetro borosilicato temperato) / Frosted pirex (tempered borosilicate glass) |


| SPECIFICHE GENERALI ALIMENTAZIONE / GENERAL POWER SPECIFICATIONS |                                     |                                     |
|------------------------------------------------------------------|-------------------------------------|-------------------------------------|
| INFO                                                             | EUROPE                              | USA                                 |
| Alimentazione / Power Supply                                     | 220-240V – 50/60Hz                  | 100-120V – 50/60Hz                  |
| Tensione led / Led voltage                                       | 24VDC (driver incl. / driver incl.) | 24VDC (driver incl. / driver incl.) |
| Dimmerabilità / Dimmability                                      | Su richiesta / On request           | Su richiesta / On request           |


| SPECIFICHE LED / LED SPECIFICATIONS |                               |                          |
|-------------------------------------|-------------------------------|--------------------------|
| INFO                                | LIGHT SOURCE                  | MAX WATTAGE              |
| A-B-C-D-E 50                        | Tubo led 360° / Led tube 360° | 6W – 400 Lumen – 3000K   |
| A-B-C-D-E 75                        | Tubo led 360° / Led tube 360° | 9W – 600 Lumen – 3000K   |
| A-B-C-D-E 100                       | Tubo led 360° / Led tube 360° | 12W – 800 Lumen – 3000K  |
| A-B-C-D-E 150                       | Tubo led 360° / Led tube 360° | 18W – 1200 Lumen – 3000K |

| DATI TECNICI / TECHNICAL DATA              |                                                |                                                                                                                                                                                   |
|--------------------------------------------|------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sospensione / Pendant                      | Plafoniera / Ceiling                           | Sospensione / Pendant                                                                                                                                                             |
| Soffitto / Ceiling                         | Soffitto / Ceiling                             | Soffitto / Ceiling                                                                                                                                                                |
| Diametro / Diameter Ø 2 cm / 0,78"         | Diametro / Diameter Ø 2 cm / 0,78"             | Diametro / Diameter Ø 2 cm / 0,78"                                                                                                                                                |
| Vetro / Glass Ø 1,8 cm / 0,70"             | Vetro / Glass Ø 1,8 cm / 0,70"                 | Vetro / Glass Ø 1,8 cm / 0,70"                                                                                                                                                    |
| Cavo / wire 300 cm. / 118,1"               | Cavo / wire 300 cm. / 118,1"                   | Cavo / wire 300 cm. / 118,1"                                                                                                                                                      |
| Altezza / Height                           | A-B-C 50<br>A-B-C 75<br>A-B-C 100<br>A-B-C 150 | cm.53 / 20,9"<br>cm.78 / 30,7"<br>cm.103 / 40,6"<br>cm.153 / 60,2"                                                                                                                |
| Rosone THE LINE A<br>Canopy THE LINE A     | 50-75-100-150                                  | Ø 5 cm. – h.11 cm. / Ø 2" – h.4,3" (plus plate Ø 4,72")<br>Ø 5 cm. – h.14 cm. / Ø 2,4" – h.5,5" (plus plate Ø 4,72")<br>Ø 5 cm. – h.14 cm. / Ø 3,1" – h.5,5" (plus plate Ø 4,72") |
| Rosone THE LINE B-C<br>Canopy THE LINE B-C | 50-75-100-150                                  | Ø 3 cm. – h.2 cm. / Ø 1,2" – h.0,8"                                                                                                                                               |

| PESO NETTO / NET WEIGHT |          |  |           |          |
|-------------------------|----------|--|-----------|----------|
| A-D 50                  | Kg.0,550 |  | B-C-E 50  | Kg.0,300 |
| A-D 75                  | Kg.0,650 |  | B-C-E 75  | Kg.0,400 |
| A-D 100                 | Kg.0,750 |  | B-C-E 100 | Kg.0,500 |
| A-D 150                 | Kg.0,950 |  | B-C-E 150 | Kg.0,700 |

USA CANOPY FOR CIMPOSITION THE LINE "A" & "D"

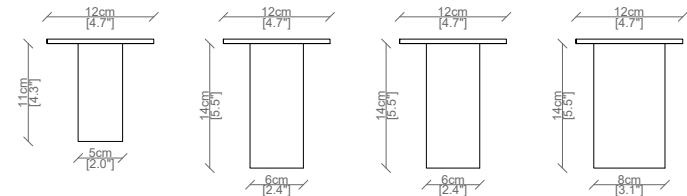


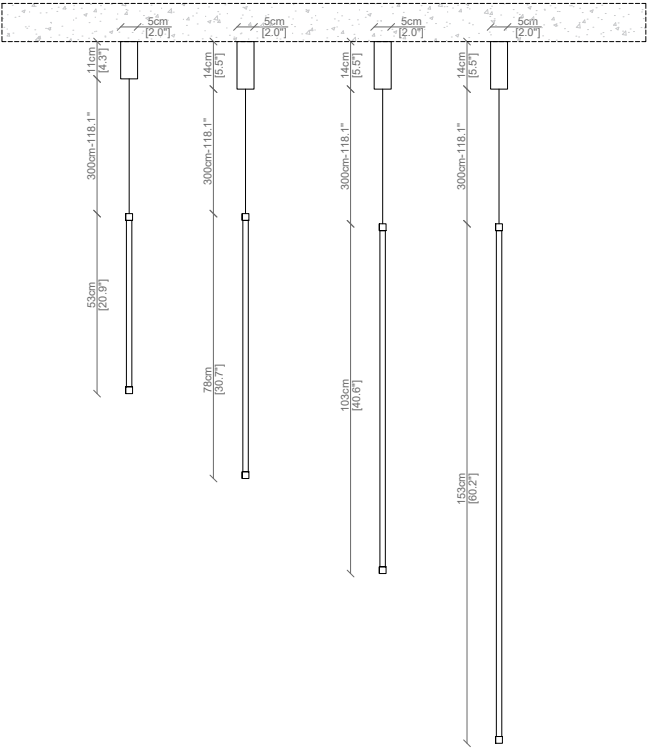

COMPOSIZIONI VERTICALI - A

Installazione per composizioni verticali, con rosone ed alimentazione indipendente  
Misure disponibili standard cm.53, 78, 103, 153 (20,9", 30,7", 40,6", 60,2")


Installation for vertical compositions, with canopy and independent power supply  
Standard available sizes cm.53, 78, 103, 153 (20,9", 30,7", 40,6", 60,2")

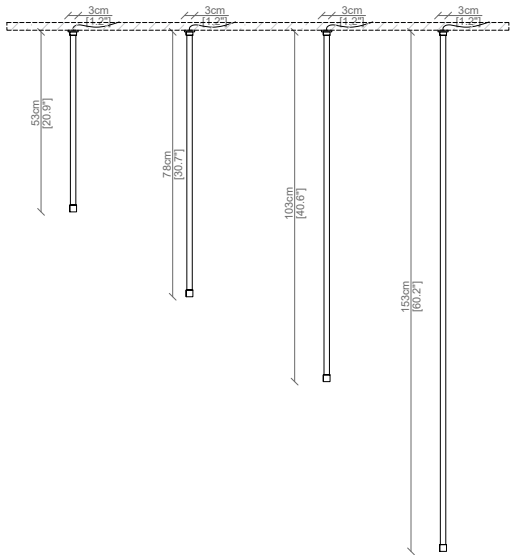

COMPOSIZIONI VERTICALI - B

Installazione per composizioni verticali, con attacco diretto al soffitto ed alimentazione in remoto  
Misure disponibili standard cm.53, 78, 103, 153 (20,9", 30,7", 40,6", 60,2")


Installation for vertical compositions, with direct ceiling block and remote power supply  
Standard available sizes cm.53, 78, 103, 153 (20,9", 30,7", 40,6", 60,2")

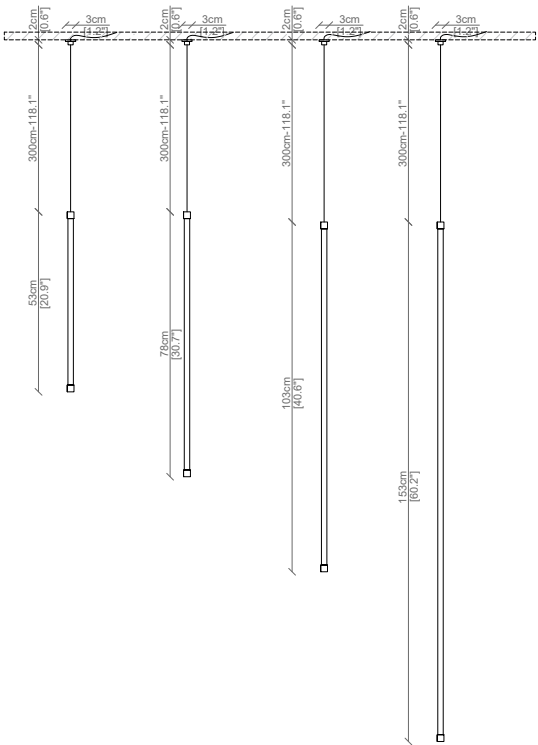

COMPOSIZIONI VERTICALI - C

Installazione per composizioni verticali con controsoffitti ed alimentazione in remoto  
Misure disponibili standard cm.53, 78, 103, 153 (20,9", 30,7", 40,6", 60,2")

Installation for vertical compositions, with false ceilings and remote power supply  
Standard available sizes cm.53, 78, 103, 153 (20,9", 30,7", 40,6", 60,2")

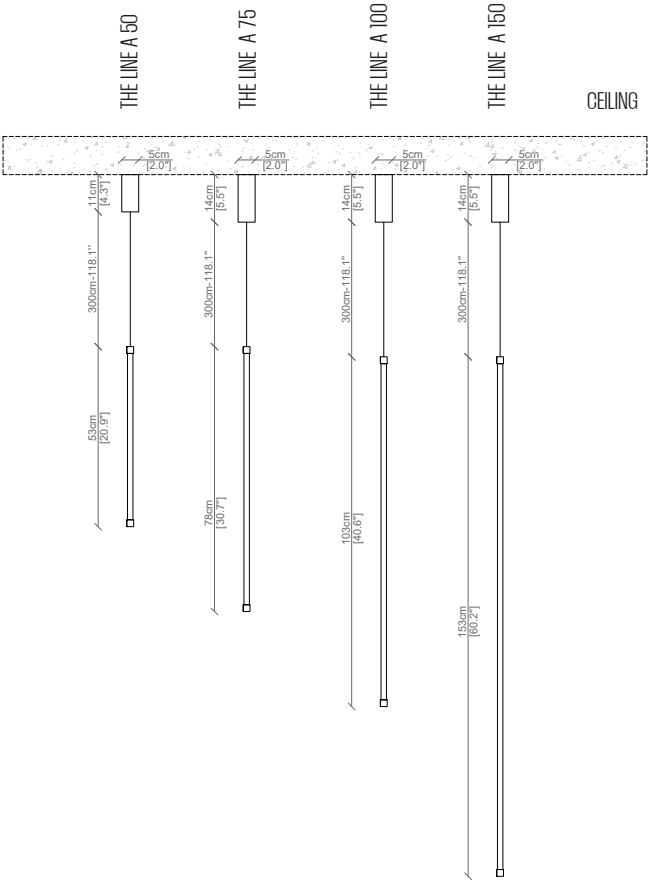

CEILING

THE LINE 50 A

6w - 400 Lumen -3000k

THE LINE 75 A

9w - 600 Lumen -3000k

THE LINE 100 A


12w - 800 Lumen -3000k

THE LINE 150 A

18w - 1200 Lumen -3000k

Tubo LED con ottica di luce a 360°, alta efficienza luminosa e distribuzione uniforme della luce.  
Alimentazione 24Vdc, 3000K, dimmerabile

LED tube with 360° light optics, high luminous efficiency and uniform light distribution.  
Power supply 24Vdc, 3000K, dimmerable

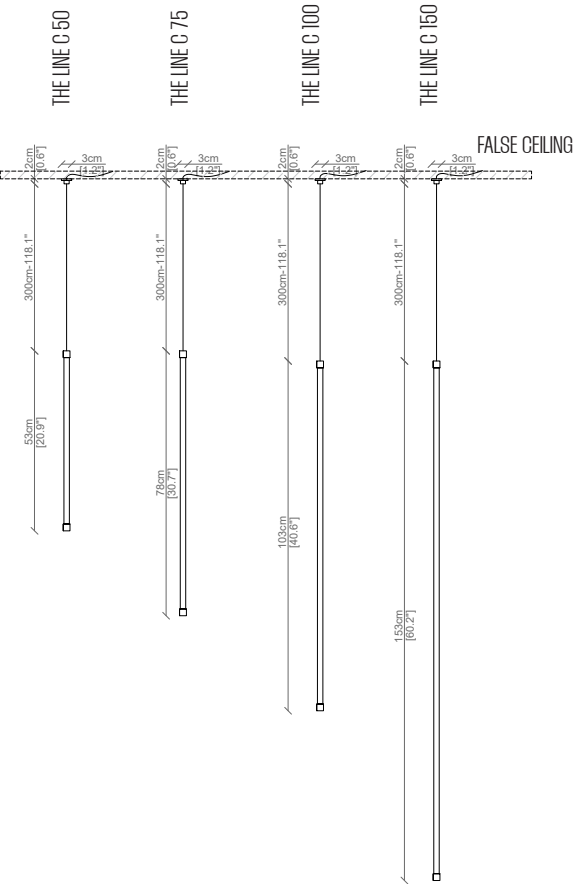

FALSE CEILING

THE LINE B 50

THE LINE B 75

THE LINE B 100

THE LINE B 150

FALSE CEILING

